



SAFETY EQUIPMENT

The Safety Equipment 7000-Series Compressed Gas Cabinets hold from one to four gas cylinders. They are constructed with high quality materials for long life and ease of use. Our compressed cabinets meet or exceed all existing code requirements worldwide. Custom features and cabinet configurations are available upon request. Safety Equipment has been supplying industries with compressed gas cabinets since 1979.

- **Low cost**
- **In stock**
- **Custom cabinets a specialty.**
- **Extra heavy duty steel construction 12 gauge steel (0.105 inches), thicker than code requirement.**
- **One piece body construction for safety.**
- **All welded construction with bolt on hinges.**
- **Cabinet is ground smooth for clean room capability.**
- **Louver panel acts as pressure relief vent.**
- **Protective enclosure prevents accidentally hitting regulators, valves, and purge assemblies.**
- **Allows for toxic gas monitoring.**
- **Access window.**
- **Our gas cabinets meet standard S2-93 safety guidelines for semiconductor manufacturing equipment.**
- **Meets international fire code.**

Construction

All cabinets are constructed using 12- gauge (.105-inches) thick steel. Sub- flooring is provided to eliminate rusting of the cabinets bottom. Adjustable cylinder brackets allow for precise fitting to pigtail. The cabinet door and clear fire-rated window will close and latch automatically. Welding is used whenever possible in order to achieve maximum strength and to aid in easy removal of components for repair and/or replacement. All fasteners used to mount components such as windows, door handles, purge assembly mounting panels and cylinder brackets are of stainless steel. Cabinet is powder coated to create a durable finish that is ease to maintain a clean environment on both inside and outside.

Exhausting

The exhaust vent is located on top of cabinet. Louvers allow air to enter cabinet for exhausting. They are located on the lower part of the door, which provides maximum coverage

Gas Cabinets

7000-Series Compressed gas cabinets

of airflow through cabinet. Back panel, which mounts valves, regulators, and purge assemblies is mounted to facilitate air flow behind panel for complete internal cabinet exhausting. Where cylinder shelves are employed, shelves are perforated in order to allow maximum air flow through cabinet.


Safety and Monitoring

Cylinders, valves and purge assemblies are isolated from accidental contact, vandals, and other assemblies, thus avoiding leaks. Cylinder brackets will hold cylinders in the event of a fire or earthquake. A filter is mounted on the inside of the cabinet door behind the louvers, allowing for process protection by minimizing contamination from ambient air impurities.

Windows permit visual inspection and/or access into cabinet for adjustments while minimizing operators exposure to potential toxic leaks. Water sprinkler heads on ceiling of cabinet activate between 160 F and 165 F and are coated for protection from corrosive environments.



Gas Cabinet Models
(all dimensions in inches)

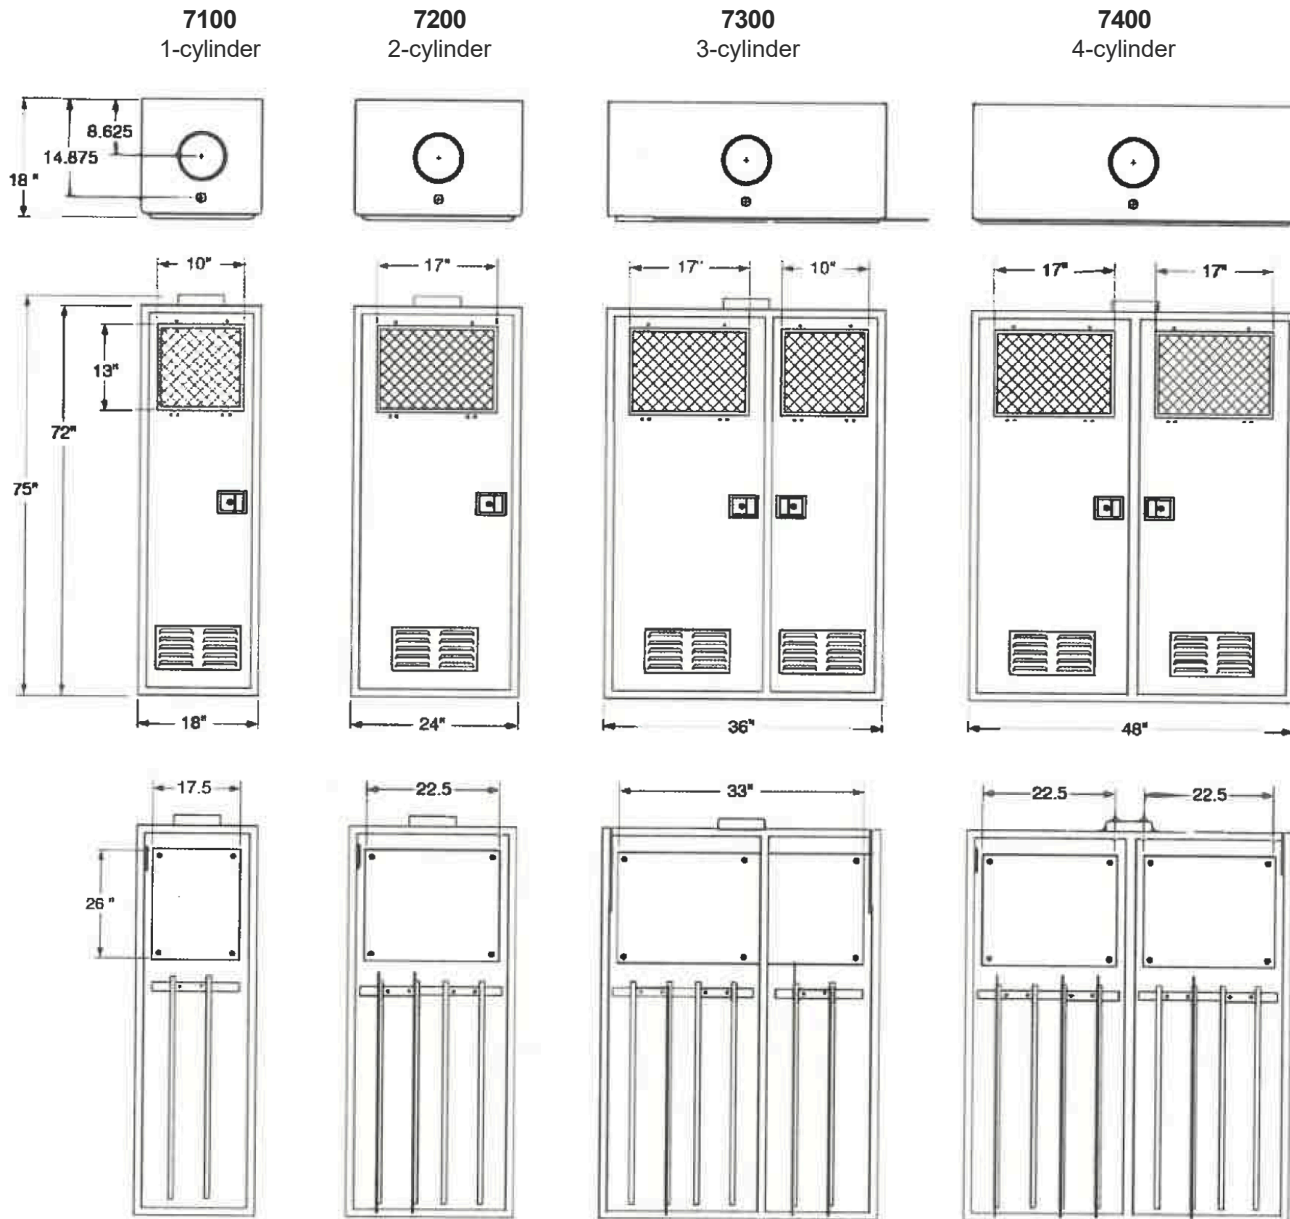

Features:

- All welded construction using 12 gauge steel and powder coated for a durable finish.
- Exhaust vent located on top of cabinet is 6" diameter x 3" high.
- 165 °F sprinkler head on top of cabinet.
- Removable white back panel mounts to inside rear cabinet.

- Cylinder bracket accommodates 7" to 10" diameter cylinders. The brackets are adjustable for precise pig-tail alignment.
- Door and window will close and latch automatically.
- Window is 1/4" thick clear wire glass.
- Louvers at bottom of door.
- Flush mounted stainless steel paddle latch.

Options:

- All stainless steel fasteners
- Adjustable shelves
- Keyed door latch
- Air intake filter
- Custom colors
- Rubber floor mat



Safety Equipment Corporation
2979 S. Beverly St.
Boise, ID 83709

(650) 595-5422
Fax (650) 595-0143

Email: Info@SafetyEquipmentCorp.com

Web: SafetyEquipmentCorp.com